




D-Series Size 1 LED Area Luminaire



d^{series}

Specifications

EPA:	1.2 ft ² (0.11 m ²)
Length:	33" (83.8 cm)
Width:	13" (33.0 cm)
Height:	7-1/2" (19.0 cm)
Weight (max):	27 lbs (12.2 kg)

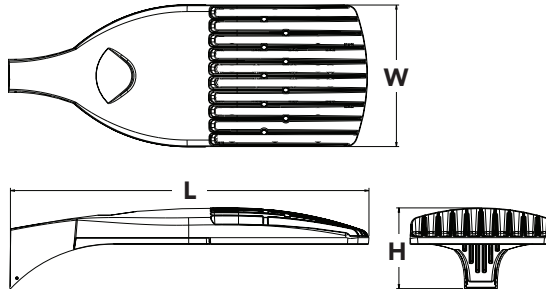

Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction


The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment.

The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire. The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing 100 – 400W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

Ordering Information

EXAMPLE: DSX1 LED 60C 1000 40K T3M MVOLT SPA DDBXD

DSX1 LED										
Series	LEDs	Drive current	Color temperature	Distribution	Voltage	Mounting	Control options	Other options	Finish (required)	
DSX1 LED	Forward optics	530 530 mA	30K 3000 K (80 CRI min.)	T1S Type I short	MVOLT ³	Shipped included	Shipped installed	Shipped installed	DDBXD Dark bronze	
	30C 30 LEDs (one engine)	700 700 mA	40K 4000 K (70 CRI min.)	T2S Type II short	120 ³	SPA Square pole mounting	PER NEMA twist-lock receptacle only (no controls) ⁷	HS House-side shield ¹⁴	DBLXD Black	
	40C 40 LEDs (two engines)	1000 1000 mA (1 A)	50K 5000 K (70 CRI)	T2M Type II medium	208 ³	RPA Round pole mounting	DMG 0-10V dimming driver (no controls) ⁸	WTB Utility terminal block ¹⁵	DNAXD Natural aluminum	
	60C 60 LEDs (two engines)		AMBPC Amber phosphor converted ²	T3S Type III short	240 ³	WBA Wall bracket	DCR Dimmable and controllable via ROAM [®] (no controls) ⁹	SF Single fuse (120, 277, 347V) ¹⁶	DWHXD White	
	Rotated optics¹			T3M Type III medium	277 ³	SPUMBA Square pole universal mounting adaptor ⁵	DS Dual switching ^{10,11}	DF Double fuse (208, 240, 480V) ¹⁶	DBLTXD Textured dark bronze	
	60C 60 LEDs (two engines)			T4M Type IV medium	347 ⁴	RPUMBA Round pole universal mounting adaptor ⁵	PIR Motion sensor, 8-15' mounting height ¹²	L90 Left rotated optics ¹⁷	DNATXD Textured natural aluminum	
				TFTM Forward throw medium	480 ⁴	KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁶	PIRH Motion sensor, 15-30' mounting height ¹²	R90 Right rotated optics ¹⁷	DWHGXD Textured white	
				T5VS Type V very short			BL30 Bi-level switched dimming, 30% ^{11,13}			
				T5S Type V short			BL50 Bi-level switched dimming, 50% ^{11,13}			
				T5M Type V medium						
				T5W Type V wide						

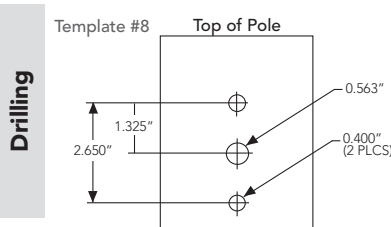

Accessories	
Order and shipped separately.	
DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) ¹⁸
DSL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) ¹⁸
DL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) ¹⁸
SC U	Shorting cap ¹⁸
DSX1HS 30C U	House-side shield for 30 LED unit
DSX1HS 40C U	House-side shield for 40 LED unit
DSX1HS 60C U	House-side shield for 60 LED unit
PUMBA DDBXD U*	Square and round pole universal mounting bracket adaptor (specify finish)
KMA8 DDBXD U	Mast arm mounting bracket adaptor (specify finish) ⁶

DSX1 shares a unique drilling pattern with the AERIS™ family. Specify this drilling pattern when specifying poles, per the table below.

DM19AS	Single unit	DM29AS	2 at 90° *
DM28AS	2 at 180°	DM39AS	3 at 90° *
DM49AS	4 at 90° *	DM32AS	3 at 120° **

Example: SSA 20 4C DM19AS DDBXD

Visit Lithonia Lighting's **POLES CENTRAL** to see our wide selection of poles, accessories and educational tools.

*Round pole top must be 3.25" O.D. minimum.
**For round pole mounting (RPA) only.

Tenon Mounting Slipfitter **

Tenon O.D.	Single Unit	2 at 180°	2 at 90°	3 at 120°	3 at 90°	4 at 90°
2-3/8"	AST20-190	AST20-280	N/A	N/A	N/A	N/A
2-7/8"	AST25-190	AST25-280	N/A	AST25-320	N/A	N/A
4"	AST35-190	AST35-280	AST35-290	AST35-320	AST35-390	AST35-490

NOTES

- Rotated optics only available with 60C.
- AMBPC only available with 530mA or 700mA.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120, 208, 240 or 277 options only when ordering with fusing (SF, DF options).
- Not available with single board, 530mA product (30C 530, or 60C 530 DS). Not available with DCR, BL30 or BL50.
- Available as a separate combination accessory: PUMBA (finish) U.
- Requires "SPA" mounting option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option.
- DMG option for 347v or 480v requires 1000mA
- Specifies a ROAM[®] enabled luminaire with 0-10V dimming capability; PER option required. Not available with 347 or 480V. Additional hardware and services required for ROAM[®] deployment; must be purchased separately. Call 1-800-442-6745 or email: sales@roamservices.net. N/A with BL30, BL50, DS, PIR or PIRH.
- Requires 40C or 60C. Provides 50/50 luminaire operation via two independent drivers on two separate circuits. N/A with PER, DCR, WTB, PIR, or PIRH.
- Requires an additional switched circuit.
- PIR specifies the **SensorSwitch SBGR-10-ODP** control; PIRH specifies the **SensorSwitch SBGR-6-ODP** control; see **Motion Sensor Guide** for details. Dimming driver standard. Not available with DS or DCR.
- Dimming driver standard. MVOLT only. Not available with DCR.
- Also available as a separate accessory; see Accessories information.
- WTB not available with DS.
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Available with 60 LEDs (60C option) only.
- Requires luminaire to be specified with PER option. Ordered and shipped as a separate line item from Acuity Brands Control.



Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Actual performance may differ as a result of end-user environment and application. Actual wattage may differ by +/- 8% when operating between 120-480V +/-10%. Contact factory for performance data on any configurations not shown here.

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 80 minimum CRI)					40K (4000 K, 70 minimum CRI)					50K (5000 K, 70 CRI)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
30C (30 LEDs)	700 mA	68 W	T1S	5,290	1	0	1	78	6,524	2	0	2	96	7,053	2	0	2	104
			T2S	5,540	1	0	1	81	6,833	2	0	2	100	7,387	2	0	2	109
			T2M	5,360	1	0	2	79	6,611	2	0	2	97	7,147	2	0	2	105
			T3S	5,479	1	0	1	81	6,757	1	0	2	99	7,305	2	0	2	107
			T3M	5,452	1	0	2	80	6,724	2	0	2	99	7,269	2	0	2	107
			T4M	5,461	1	0	2	80	6,736	2	0	2	99	7,282	2	0	2	107
			TFTM	5,378	1	0	2	79	6,633	1	0	2	98	7,171	1	0	2	105
			TSVS	5,708	2	0	0	84	7,040	3	0	0	104	7,611	3	0	1	112
			TSS	5,639	2	0	0	83	6,955	2	0	0	102	7,519	3	0	0	111
			TSM	5,710	3	0	1	84	7,042	3	0	1	104	7,613	3	0	2	112
	1000 mA	105 W	TSW	5,551	3	0	1	82	6,847	3	0	2	101	7,401	3	0	2	109
			T1S	7,229	2	0	2	69	9,168	2	0	2	87	9,874	2	0	2	94
			T2S	7,572	2	0	2	72	9,603	2	0	2	91	10,342	2	0	2	98
			T2M	7,325	2	0	2	70	9,291	2	0	2	88	10,005	2	0	3	95
			T3S	7,488	2	0	2	71	9,496	2	0	2	90	10,227	2	0	2	97
			T3M	7,451	2	0	2	71	9,450	2	0	2	90	10,177	2	0	2	97
			T4M	7,464	2	0	2	71	9,467	2	0	2	90	10,195	2	0	2	97
			TFTM	7,351	1	0	2	70	9,323	2	0	2	89	10,040	2	0	3	96
			TSVS	7,801	3	0	1	74	9,894	3	0	1	94	10,655	3	0	1	101
			TSS	7,803	3	0	2	74	9,774	3	0	1	93	10,526	3	0	1	100
			TSM	7,707	3	0	0	73	9,897	3	0	2	94	10,658	4	0	2	102
40C (40 LEDs)	700 mA	89 W	TSW	7,586	3	0	2	72	9,621	4	0	2	92	10,363	4	0	2	99
			T1S	6,876	2	0	2	77	8,639	2	0	2	97	9,345	2	0	2	105
			T2S	7,202	2	0	2	81	9,049	2	0	2	102	9,788	2	0	2	110
			T2M	6,968	2	0	2	78	8,755	2	0	2	98	9,469	2	0	3	106
			T3S	7,122	2	0	2	80	8,948	2	0	2	101	9,679	2	0	2	109
			T3M	7,088	2	0	2	80	8,905	2	0	2	100	9,632	2	0	2	108
			T4M	7,100	2	0	2	80	8,920	2	0	2	100	9,649	2	0	2	108
			TFTM	6,992	1	0	2	79	8,785	2	0	2	99	9,502	2	0	2	107
			TSVS	7,421	3	0	0	83	9,323	3	0	1	105	10,085	3	0	1	113
			TSS	7,331	2	0	0	82	9,210	3	0	1	103	9,962	3	0	1	112
	1000 mA	138 W	TSM	7,423	3	0	2	83	9,326	3	0	2	105	10,087	4	0	2	113
			TSW	7,216	3	0	2	81	9,066	4	0	2	102	9,807	4	0	2	110
			T1S	9,521	2	0	2	69	11,970	2	0	2	87	12,871	3	3	0	93
			T2S	9,972	2	0	2	72	12,558	3	0	3	91	13,481	3	0	3	98
			T2M	9,648	2	0	3	70	12,149	3	0	3	88	13,043	3	0	3	95
			T3S	9,862	2	0	2	71	12,418	2	0	2	90	13,331	2	0	2	97
			T3M	9,814	2	0	2	71	12,358	3	0	3	90	13,267	3	0	3	96
			T4M	9,831	2	0	2	71	12,379	2	0	3	90	13,290	2	0	3	96
			TFTM	9,681	2	0	2	70	12,191	2	0	3	88	13,087	2	0	3	95
			TSVS	10,275	3	0	1	74	12,937	3	0	1	94	13,890	4	0	1	101
			TSS	10,150	3	0	1	74	12,782	3	0	1	93	13,721	3	0	1	99
60C (60 LEDs)	700 mA	131 W	TSM	10,278	4	0	2	74	12,942	4	0	2	94	13,894	4	0	2	101
			TSW	9,991	4	0	2	72	12,582	4	0	2	91	13,507	4	0	2	98
			T1S	10,226	2	0	2	78	12,871	3	0	3	98	13,929	3	0	3	106
			T2S	10,711	2	0	2	82	13,481	3	0	3	103	14,589	3	0	3	111
			T2M	10,363	2	0	3	79	13,043	3	0	3	100	14,115	3	0	3	108
			T3S	10,592	2	0	2	81	13,331	2	0	2	102	14,427	3	0	3	110
			T3M	10,541	2	0	2	80	13,267	3	0	3	101	14,357	3	0	3	110
			T4M	10,559	2	0	2	81	13,290	2	0	3	101	14,382	3	0	3	110
			TFTM	10,398	2	0	3	79	13,087	2	0	3	100	14,163	2	0	3	108
			TSVS	11,036	3	0	1	84	13,890	4	0	4	106	15,032	4	0	1	115
	1000 mA	209 W	TSS	10,902	3	0	1	83	13,721	3	0	1	105	14,849	4	0	1	113
			TSM	11,039	4	0	2	84	13,894	4	0	2	106	15,036	4	0	2	115
			TSW	10,732	4	0	2	82	13,507	4	0	2	103	14,617	4	0	2	112
			T1S	14,017	3	0	3	67	17,632	3	0	3	84	19,007	3	0	3	91
			T2S	14,681	3	0	3	70	18,467	3	0	3	88	19,908	3	0	3	95
			T2M	14,204	3	0	3	68	17,867	3	0	3	85	19,260	3	0	3	92
			T3S	14,518	3	0	3	69	18,262	3	0	3	87	19,687	3	0	3	94
			T3M	14,448	3	0	3	69	18,173	3	0	4	87	19,591	3	0	4	94
			T4M	14,473	3	0	3	69	18,205	3	0	3	87	19,625	3	0	4	94
			TFTM	14,253	2	0	3	68	17,928	3	0	4	86	19,326	3	0	4	92
			TSVS	15,127	4	0	1	72	19,028	4	0	1	91	20,512	4	0	1	98
			TSS	14,943	4	0	1	71	18,797	4	0	1	90	20,263	4	0	1	97
			TSM	15,131	4	0	2	72	19,033	4	0	2	91	20,517	5	0	3	98
			TSW	14,710	4	0	2	70	18,503	5	0	3	89	19,946	5	0	3	95

Note: Available with phosphor-converted amber LED's (nomenclature AMBPC). These LED's produce light with 97+% >530 nm. Output can be calculated by applying a 0.7 factor to 4000 K lumen values and photometric files.



Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.99

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	DSX1 LED 60C 1000			
	1.0	0.95	0.93	0.88
	DSX1 LED 60C 700			
	1.0	0.99	0.98	0.96


Electrical Load

Number of LEDs	Drive Current (mA)	System Watts	Current (A)					
			120	208	240	277	347	480
30	530	52	0.52	0.30	0.26	0.23	--	--
	700	68	0.68	0.39	0.34	0.30	0.24	0.17
	1000	105	1.03	0.59	0.51	0.45	0.36	0.26
40	530	68	0.67	0.39	0.34	0.29	0.23	0.17
	700	89	0.89	0.51	0.44	0.38	0.31	0.22
	1000	138	1.35	0.78	0.67	0.58	0.47	0.34
60	530	99	0.97	0.56	0.48	0.42	0.34	0.24
	700	131	1.29	0.74	0.65	0.56	0.45	0.32
	1000	209	1.98	1.14	0.99	0.86	0.69	0.50

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Area Size 1 homepage](#).

Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (20').

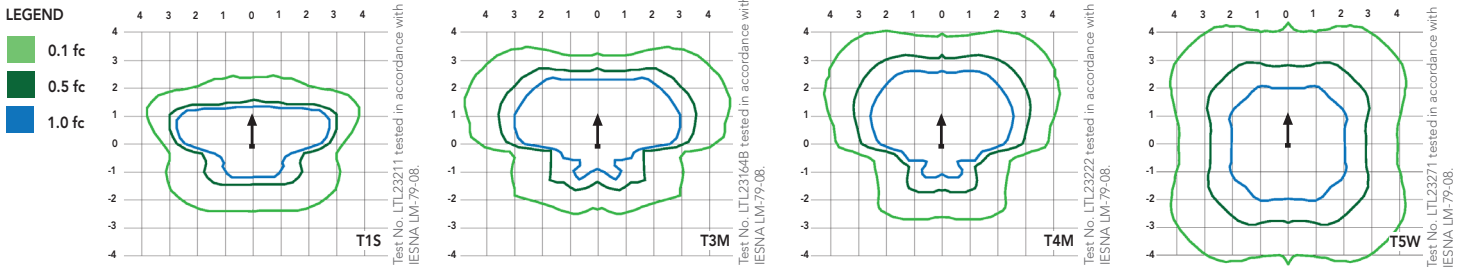

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.2 ft²) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 4000 K (70 minimum CRI) or optional 3000 K (80 minimum CRI) or 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine configurations consist of 30, 40 or 60 high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L96/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an

expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV or 6kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern. Optional terminal block, tool-less entry, and NEMA photocontrol receptacle are also available.

LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

WARRANTY

Five-year limited warranty. Full warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Specifications subject to change without notice.

